


IVECO DAILY



29L10 Semi Window Vans

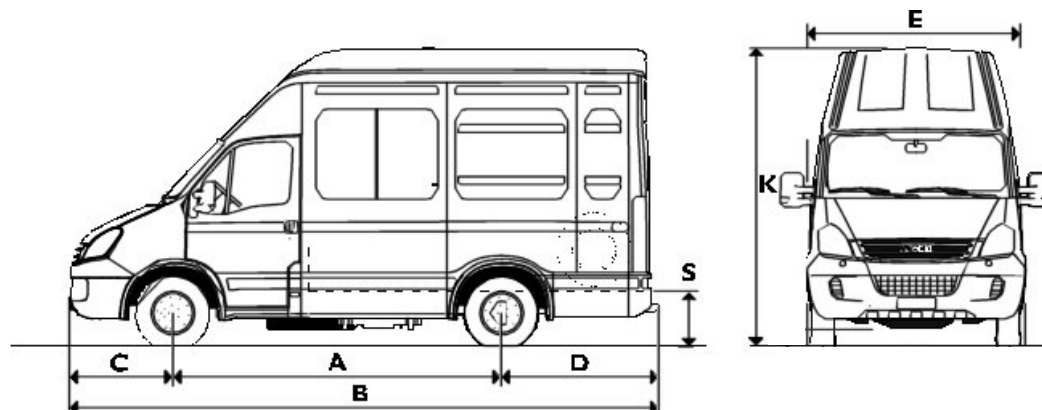

Model	29L10	29L10	29L10	29L10
-------	-------	-------	-------	-------

Dimensions (mm)

A Wheelbase	3000	3000L	3000	3000L
Roof	LR	LR	HR	HR
B Overall length	5077	5477	5077	5477
C Front overhang	998	998	998	998
D Rear overhang	1079	1479	1079	1479
E Overall width	1996	1996	1996	1996
K Overall height (unladen)	2260	2260	2635	2635
Turning circle (k to k) (m)	10.4	10.4	10.4	10.4
Turning circle (w to w) (m)	11.5	11.5	11.5	11.5

Cargo Area (standard)

S Rear floor height	660	660	660	660
Length	2600	3000	2600	3000
Height	1545	1545	1900	1900
Width	1800	1800	1800	1800
Width between wheelarches	1320	1320	1320	1320

Cargo Area with Optional Rear Seating

Length (from rr. edge of seat backrests)	1735	2135	1735	2135
Length (from rr. edge of seat anchoring frame)	2000	2400	2000	2400

Rear Door

Opening width	1540	1540	1540	1540
Opening height	1430	1430	1780	1780
Opening angle (deg)	180	270	180	270

Sliding Side Door

Opening width	1100	1100	1100	1100
Opening height	1415	1415	1780	1780

Weights (kg)

Kerb weights are with full fuel tank, oil, water, spare wheel, tools and include driver @ 75 kg. Kerb weights are subject to a manufacturing tolerance of + or - 5%

Wheelbase	3000	3000L	3000	3000L
Roof	LR	LR	HR	HR
GVW	3200	3200	3200	3200
GTW	6000	6000	6000	6000
Kerb weights				
Front axle - with optional seats	1295	1270	1295	1270
Rear axle - with optional seats	815	880	850	920
Total - with optional seats	2110	2150	2145	2190
Maximum payload - with optional seats	1090	1050	1055	1010
Plated weights				
Front axle	1500	1500	1500	1500
Rear axle	1900	1900	1900	1900

IVECO DAILY 29L10 Semi Window Van

Engine

Fuel	Diesel
Capacity (litres)	2.3
Cylinders	4 (16 valves)
Emission Compliance	Euro 4
Fuel System	Common rail Generation 2
Power (hp/ kW)	99/ 71
@ rpm	2700-3900
Torque (Nm/ lbft)	240/ 178
@ rpm	1700-3000
Exhaust System	Side emit - RHS

Gearboxes

Type	5S3000D
	5 speed
	synchromesh
	overdrive
1st gear	4.99 : 1
Top gear	0.78 : 1

Performance

Gear	1st	Top
Max. geared speed (mph)	15	97
Gradeability @ GVW (%)	40+	7

Rear Axle Ratios

Standard	3.92
----------	------

Clutch

Type	Hydraulic
Diameter	235

Electrics

Alternator - std	14v - 110A
Alternator - opt	14v - 140A
Battery	12v - 110Ah

Lighting & Signalling

Halogen headlamps; front fog lamps; twin rear fog lamps; twin reverse lamps

Suspension

Front	Independent with transverse leaf spring
Rear	Single leaf parabolic
Anti-roll Bar	Standard on rear axle
Shock absorbers	Front and rear

Brakes

Front / Diameter	Ventilated disc brakes / 300 mm
Rear / Diameter	Disc brakes / 296 mm
ABS + ABD	Standard
Parking brake	On rear axle

Steering

Power assisted - Rack & Pinion

Wheels & Tyres

Wheels	6JK 16
Tyres	205/ 65R16
Spare	Located behind left wheel arch in rear

Fuel Tank

70 litres on nearside with locking fuel cap

Standard Equipment

Cab

Fully adjustable driver's seat with headrest	Dual passenger seat with headrests
Three point inertia reel belt on all seats	Large dual storage pockets in doors
Exterior mirrors with integrated wide angle and direction indicators	Single piece floor mat
Underseat storage	2 cup holders
A4 storage compartment	Glove compartment with added storage
Clip holder	Bottle holder
Cooled compartment (with opt. air conditioning)	Additional in-dash storage
	Lighting to rear compartment

Heating & Ventilation

Four speed fan with 5 different distribution modes and cab recirculation
Windshield and side window defrost facility
Fresh air ventilation when heater turned off

Dashboard incorporates

Dash-mounted gear lever	RDS stereo radio/CD player (with Can security)
Provision for GPS or tachograph	Speedometer
Coolant temperature indicator	Rev. counter
3 DIN drawers, two of which carry CD Player and/or tachograph	
LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation (dip/main); clock	

Security

Central locking with remote control and door locking management - anti-theft system	Engine immobiliser
Full bulkhead with sliding window behind driver (deleted when 2nd row of seats is specified)	Steering lock
	Unglazed rear doors

Load Area

Side load door with sliding window and sliding window opposite side load door
Provision in floor for optional 3 person bench seat with 3 point seat belts
Floor - steel ribbed with load lashing rings
Sides - reinforced with load lashing rings
Side access via top hung side sliding door with internal step and grab handle
Rear access by hinged doors with stops at 90 and 270 degrees and grab handle
Interior lights at side and rear (door operated with individual isolation)

Construction & Finish

C-section steel longitudinal side members and tubular cross members with pressed steel unitary construction body mounted on rubber bushes. Anti-corrosion protection includes full catheporetic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

Options

AGile semi-automated 6-speed gearbox
Airbag for driver with seat belt pretensioners
Airbags for driver and passengers with seat belt tensioners
Airbags for driver and passengers with seat belt tensioners plus window bags
Air conditioning
Alarm system to cab and load area
Alternator- heavy duty
Ambient air temperature gauge (option with air conditioning)
ASR - Traction control
Blue Tooth vivavoice system with steering wheel controls
Body builder connectors
Bulkhead for 2nd passenger row
Colour keyed bumper and trim
Comfort dashboard - LCD panel additions include: External temperature display; servicing indicator; ice warning; automated gearbox
Comfort seats - driver and passenger
ECAS air suspension on rear axle
ESP - Electronic Stability Programme (includes ABS - Anti-lock Brakes, EBD - Electronic Brake Force Distribution, ASR - Traction Control, MSR - Motor Torque Reduction, HBA - Hydraulic Brake Assist)
Exhaust with CRT
Exterior mirrors - heated and electrically adjustable
Fuel tank with locking cap - 100 litres
GPS satellite navigation
Headlamp washers
Overhead windscreen storage rack and DIN drawer
PVC trim
Rear axle ratio options
Rear camera and spot light
Rear seating - 2nd row 3 person bench seat (M1 tested), 3 point inertia reel seat belts on all seats, wooden floor, side and roof trim (deletion of bulkhead and lining are mandatory with this option), Reverse parking sensor integrated into rear step
Full screen satellite navigation
Tachograph - digital
Third stop light
Tow bar with ball
Towing electric socket (13 pin)
Windows electrically operated

For a complete list of Daily options please contact your local Iveco distributor