


# IVECO DAILY



## 35C12 / 35C15 / 35C18 Semi Window Vans

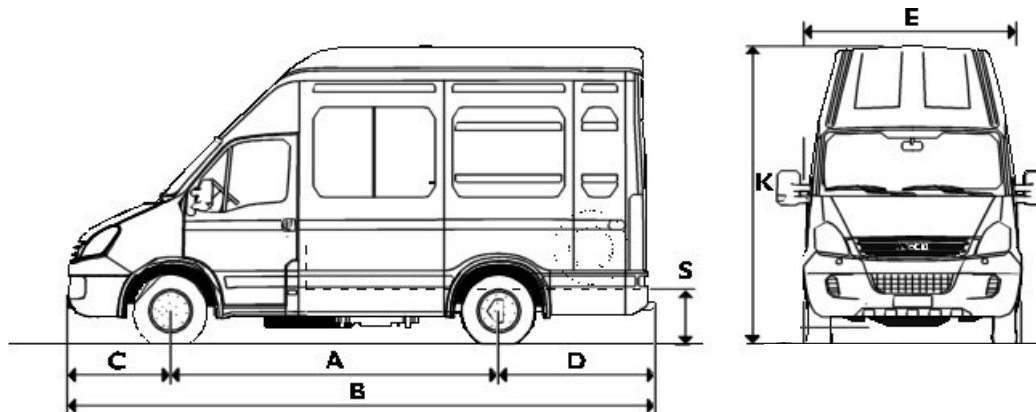

### MODELS

	35C12	35C12
	35C15	35C15
	35C18	35C18

### Dimensions (mm)

<b>A</b> Wheelbase	3300	3950
Roof	HR	HR
<b>B</b> Overall length	5997	7012
<b>C</b> Front overhang	998	998
<b>D</b> Rear overhang	1699	2064
<b>E</b> Overall width	1996	1996
<b>K</b> Overall height (unladen)	2705	2705
Turning circle (k to k) (m)	11.2	13.1
Turning circle (w to w) (m)	12.4	14.3

### Cargo Area (standard)

<b>S</b> Rear floor height	735	735
Length	3520	4560
Height	1900	1900
Width	1800	1800
Width between wheelarches	1030	1030

### Cargo Area with Optional Rear Seating

Length (from rr. edge of seat backrests)	2505	3520
Length (from rr. edge of seat anchoring frame)	2770	3785

### Rear Door

Opening width	1540	1540
Opening height	1780	1780
Opening angle (deg)	270	270

### Sliding Side Door

Opening width	1250	1250
Opening height	1780	1780

### Weights (kg)

Kerb weights are with full fuel tank, oil, water, spare wheel, tools and include driver @ 75 kg. Kerb weights are subject to a manufacturing tolerance of + or - 5%

### Model

Model	35C12		35C15		35C18	
	3300	3950	3300	3950	3300	3950
Wheelbase	3300	3950	3300	3950	3300	3950
Roof	HR	HR	HR	HR	HR	HR
GVW	3500	3500	3500	3500	3500	3500
GTW	6300	6300	6300	6300	6300	6300
Kerb weights						
Front axle - with optional seats	1340	1395	1410	1460	1410	1460
Rear axle - with optional seats	1060	1135	1065	1140	1065	1140
Total - with optional seats	2400	2530	2475	2600	2475	2600
Maximum payload - with optional seats	1100	970	1025	900	1025	900
Plated weights						
Front axle	1800	1800	1800	1800	1800	1800
Rear axle	2600	2600	2600	2600	2600	2600

Iveco reserves the right to make such changes to this specification as are appropriate in pursuance of its policy of continuing development. This issue supercedes all previous issues.

# IVECO DAILY 35C12 / 35C15 / 35C18 Semi Window Van

Engines	C12	C15	C18	
Fuel	Diesel	Diesel	Diesel	
Capacity (litres)	2.3	3.0	3.0	
Cylinders	4 (16 valves)			
Emission Compliance	Euro 4			
Fuel System	Common rail Generation 2			
Power (hp/ kW)	116/ 85	146/ 107	176/ 130	
@ rpm	3200-3900	3000-3500	3200-3500	
Torque (Nm/ lbft)	270/ 199	350/258	400/ 295	
@ rpm	1800-2800	1400-2600	1250-3000	
Exhaust System	Side emit - RHS			
Gearboxes	C12	C15	C18	
Type	5S300OD	6S400OD	6S400OD	
	5 speed	6 speed	6 speed	
	synchromesh	synchromesh	synchromesh	
	overdrive	overdrive	overdrive	
1st gear	4.99 : 1	5.37 : 1	5.37 : 1	
Top gear	0.78 : 1	0.79 : 1	0.79 : 1	
Performance				
Gear	1st	Top	1st	Top
Max. geared speed (mph)	16	101	15	105
Gradeability @ GVW (%)	40+	6	40+	7
			40+	8
Rear Axle Ratios				
Std with HR	3.92	3.15	3.15	
Clutch	C12	C15	C18	
Type	Hydraulic	Hydraulic	Hydraulic	
Diameter	267	280	280	

Electrics	
Alternator - std	14v - 110A
Alternator - opt	14v - 140A
Battery	12v - 110Ah
Lighting & Signalling	
Halogen headlamps; front fog lamps; twin rear fog lamps; twin reverse lamps	
Suspension	
Front	Independent with transverse leaf spring
Rear	Parabolic leaf spring
Anti-roll Bar	Front and rear
Shock absorbers	Front and rear
Brakes	
Front / Diameter	Ventilated disc brakes / 290 mm
Rear / Diameter	Ventilated disc brakes / 290 mm
ABS + EBD	Standard
Parking brake	On rear axle
Steering	Power assisted - Rack & Pinion
Wheels & Tyres	
Wheels	6JK 16
Tyres	195/65R16
Spare	Located behind left wheel arch in rear
Fuel Tank	70 litres on nearside with locking fuel cap

## Standard Equipment

### Cab

Fully adjustable driver's seat with headrest  
 Three point inertia reel belt on all seats  
 Exterior mirrors with integrated wide angle and direction indicators  
 Underseat storage  
 A4 storage compartment  
 Clip holder  
 Cooled compartment (with opt. air conditioning)  
 Drivers airbag (option on 35C12)

Dual passenger seat with headrests  
 Large dual storage pockets in doors  
 Single piece floor mat  
 2 cup holders  
 Glove compartment with added storage  
 Bottle holder  
 Additional in-dash storage  
 Lighting to rear compartment

### Heating & Ventilation

Four speed fan with 5 different distribution modes and cab recirculation

Windshield and side window defrost facility  
 Fresh air ventilation when heater turned off

### Dashboard incorporates

Dash-mounted gear lever  
 Provision for GPS or tachograph  
 Coolant temperature indicator  
 3 DIN drawers, two of which carry CD Player and/or tachograph  
 LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation (dip/main); clock

RDS stereo radio/CD player (with Can security)  
 Speedometer  
 Rev. counter

### Security

Central locking with remote control and door locking management - anti-theft system  
 Full bulkhead with sliding window behind driver (deleted when 2nd row of seats is specified)

Engine immobiliser  
 Steering lock  
 Unglazed rear doors

### Load Area

Side load door with sliding window and sliding window opposite side load door  
 Provision in floor for optional 3 person bench seat with 3 point seat belts  
 Floor - steel ribbed with load lashing rings  
 Sides - reinforced with load lashing rings  
 Side access via top hung side sliding door with internal step and grab handle  
 Rear access by hinged doors with stops at 90 and 270 degrees and grab handle  
 Interior lights at side and rear (door operated with individual isolation)

### Construction & Finish

C-section steel longitudinal side members and tubular cross members with pressed steel unitary construction body mounted on rubber bushes. Anti-corrosion protection includes full catheporetic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

## Options

AGile semi-automated 6-speed gearbox  
 Airbag for driver (35C12) with seat belt pretensioners  
 Airbags for driver and passengers with seat belt tensioners  
 Airbags for driver and passengers with seat belt tensioners plus window bags  
 Air conditioning  
 Alarm system to cab and load area  
 Alternator- heavy duty  
 Ambient air temperature gauge (option with air conditioning)  
 ASR - Traction control  
 Blue Tooth vivavoice system with steering wheel controls  
 Body builder connectors  
 Bulkhead for 2nd passenger row  
 Colour keyed bumper and trim  
 Comfort dashboard - LCD panel additions include: External temperature display; servicing indicator; ice warning; automated gearbox  
 Comfort seats - driver and passenger  
 ECAS air suspension on rear axle  
 ESP - Electronic Stability Programme (includes ABS - Anti-lock Brakes, EBD - Electronic Brake Force Distribution, ASR - Traction Control, MSR - Motor Torque Reduction, HBA - Hydraulic Brake Assist)  
 Exhaust with CRT  
 Exterior mirrors - heated and electrically adjustable  
 Fuel tank with locking cap - 100 litres  
 GPS satellite navigation  
 Headlamp washers  
 Overhead windscreen storage rack and DIN drawer  
 PVC trim  
 Rear axle ratio options  
 Rear camera and spot light  
 Rear seating - 2nd row 3 person bench seat (M1 tested), 3 point inertia reel seat belts on all seats, wooden floor, side and roof trim (deletion of bulkhead and lining are mandatory with this option), Reverse parking sensor integrated into rear step  
 Full screen satellite navigation  
 Tachograph - digital  
 Third stop light  
 Tow bar with ball  
 Towing electric socket (13 pin)  
 Windows electrically operated

For a complete list of Daily options please contact your local Iveco distributor