


IVECO DAILY

35C12 / 35C15 / 35C18 Van

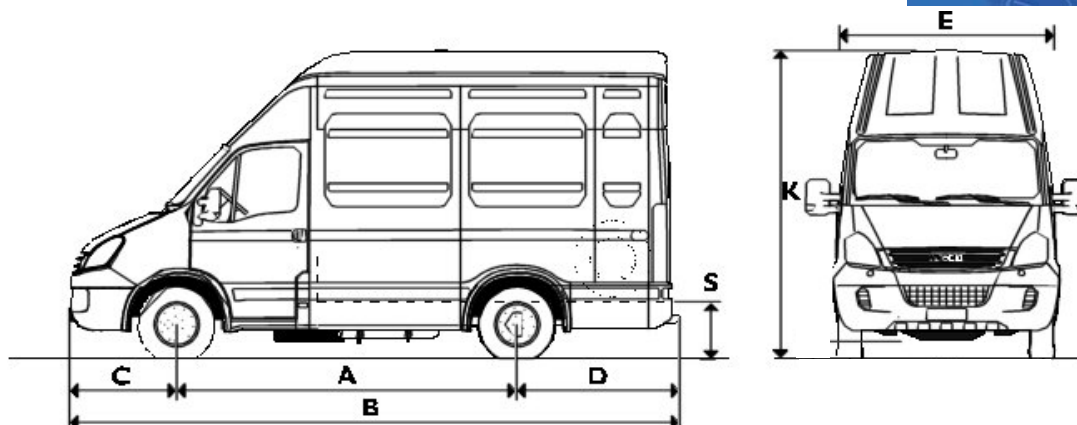

Model

	35C12	35C12	35C12	35C12
	35C15	35C15	35C15	35C15
	35C18	35C18	35C18	35C18

Dimensions (mm)

A Wheelbase	3300	3300	3950	3950
Roof	HR	XHR	HR	XHR
B Overall length	5997	5997	7012	7012
C Front overhang	998	998	998	998
D Rear overhang	1699	1699	2064	2064
E Overall width	1996	1996	1996	1996
K Overall height (unladen)	2705	2910	2705	2910
S Rear loading height	735	735	735	735
with opt. rear air suspension- raised	700+70	700+70	700+70	700+70
with opt. rear air suspension- lowered	700-50	700-50	700-50	700-50
Turning circle (k to k) (m)	11.2	11.2	13.1	13.1
Turning circle (w to w) (m)	12.4	12.4	14.3	14.3

Cargo Area

Capacity (m³)	12.0	13.2	15.6	17.2
Internal length	3520	3520	4560	4560
Internal width	1800	1800	1800	1800
Internal height	1900	2100	1900	2100
Width between wheelarches	1030	1030	1030	1030

Load Access

Rear door opening width	1540	1540	1540	1540
Rear door opening height	1780	1990	1780	1990
Rear door opening angle (deg)	270	270	270	270
Side door opening width	1250	1250	1250	1250
Side opening height	1780	1780	1780	1780

Weights (kg)

Kerb weights are with full fuel tank, oil, water, spare wheel, tools and include driver @ 75 kg. Kerb weights are subject to a manufacturing tolerance of + or - 5%.

Model

Model	35C12		35C15		35C18	
	3300	3950	3300	3950	3300	3950
GVW	3500	3500	3500	3500	3500	3500
GTW	6500	6500	7000	7000	7000	7000
Kerb weights - High Roof (HR) models*						
Front axle	1285	1320	1310	1350	1310	1350
Rear axle	985	1070	995	1080	995	1080
Total	2270	2390	2305	2430	2305	2430
Maximum Payload	1230	1110	1195	1070	1195	1070
Plated weights						
Front axle	1800	1800	1800	1800	1800	1800
Rear axle	2600	2600	2600	2600	2600	2600

*Add 30 kg on rear axle for 3300mm XHR models and 35kg on rear axle for 3950mm XHR models

Iveco reserves the right to make such changes to this specification as are appropriate in pursuance of its policy of continuing development. This issue supercedes all previous issues.

IVECO DAILY 35C12 / 35C15 / 35C18 Van

Engines	C12	C15	C18
Fuel	Diesel	Diesel	Diesel
Capacity (litres)	2.3	3.0	3.0
Cylinders	4 (16 valves)		
Emission Compliance	Euro 4		
Fuel System	Common rail Generation 2		
Power (hp/ kW)	116/ 85	146/ 107	176/ 130
@ rpm	3200-3900	3000-3500	3200-3500
Torque (Nm/ lbft)	270/ 199	350/ 258	400/ 295
@ rpm	1800-2800	1400-2600	1250-3000
Exhaust system	Side emit - RHS		

Gearboxes	C12	C15	C18
Type	5S300OD	6S400OD	6S400OD
	5 speed	6 speed	6 speed
	synchromesh	synchromesh	synchromesh
	overdrive	overdrive	overdrive
1st gear	4.99 : 1	5.37 : 1	5.37 : 1
Top gear	0.78 : 1	0.79 : 1	0.79 : 1

Performance	C12		C15		C18	
Gear	1st	Top	1st	Top	1st	Top
Max. geared speed (mph)	16	103	15	105	15	105
Gradeability @ GVW (%)	40+	6	40+	7	40+	8

Rear Axle Ratios	C12	C15	C18
Std. with HR	3.62	3.15	3.15
Std with XHR	3.92	3.62	3.42

Clutch	C12	C15	C18
Type	Hydraulic	Hydraulic	Hydraulic
Diameter	267	280	280

Electrics	
Alternator - std	14v - 110A
Alternator - opt	14v - 140A
Battery	12v - 110Ah

Lighting & Signalling
Halogen headlamps; front fog lamps; twin rear fog lamps; twin reverse lamps

Suspension	
Front	Independent with transverse leaf spring
Rear	Parabolic leaf spring
Anti-roll Bar	Front and rear
Shock absorbers	Front and rear

Brakes	
Front / diameter	Ventilated disc brakes / 290 mm
Rear / diameter	Ventilated disc brakes / 290 mm
ABS + EBD	Standard
Parking brake	On rear axle

Steering Power assisted - Rack & Pinion

Wheels & Tyres	
Wheels	6JK 16
Tyres	195/65R16
Spare	Located behind left wheel arch in rear

Fuel Tank 70 litres on nearside with locking fuel cap

Standard Equipment

Cab

Drivers airbag (option on 35C12)	Dual passenger seat with headrests
Fully adjustable driver's seat with headrest	Large dual storage pockets in doors
Three point inertia reel belt on all seats	Single piece floor mat
Exterior mirrors with integrated wide angle and direction indicators	2 cup holders
Underseat storage	Glove compartment with added storage
A4 storage compartment	Bottle holder
Cooled compartment (with opt. air conditioning)	Additional in-dash storage
	Clip holder

Heating & Ventilation

Four speed fan with 5 different distribution modes and cab recirculation
Windshield and side window defrost facility
Fresh air ventilation when heater turned off

Dashboard incorporates

Dash-mounted gear lever	RDS stereo radio/CD player (with Can security)
Provision for GPS or tachograph	Speedometer
Coolant temperature indicator	Rev. counter
3 DIN drawers, two of which carry CD Player and/or tachograph	
LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation (dip/main); clock	

Security

Central locking with remote control and door locking management - anti-theft system	Engine immobiliser
Steering lock	Unglazed full bulkhead
	Unglazed rear doors

Load Area

Floor - steel ribbed with load lashing rings
Sides - reinforced with load lashing rings
Side access via top hung side sliding door with internal step and grab handle
Rear access by hinged doors with stops at 90 and 270 degrees and grab handle
Interior lights at side and rear (door operated with individual isolation)

Construction & Finish

C-section steel longitudinal side members and tubular cross members with pressed steel unitary construction body mounted on rubber bushes. Anti-corrosion protection includes full cathodic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

Options

AGile semi-automated 6-speed gearbox
Airbag for driver (35C12) with seat belt pretensioners
Airbags for driver and passengers with seat belt tensioners
Airbags for driver and passengers with seat belt tensioners plus window bags
Air conditioning
Alarm system to cab and load area
Alternator- heavy duty
Ambient air temperature gauge (option with air conditioning)
ASR - Traction control
Blue Tooth vivavoice system with steering wheel controls
Body builder connectors
Colour keyed bumper and trim
Comfort dashboard - LCD panel additions include: External temperature display; servicing indicator; ice warning; automated gearbox
Comfort seats - driver and passenger
ECAS air suspension on rear axle
ESP - Electronic Stability Programme (includes ABS - Anti-lock Brakes, EBD - Electronic Brake Force Distribution, ASR - Traction Control, MSR - Motor Torque Reduction, HBA - Hydraulic Brake Assist)
Exhaust with CRT
Exterior mirrors - heated and electrically adjustable
Fuel tank with locking cap - 100 litres
GPS satellite navigation
Headlamp washers
Overhead windscreen storage rack and DIN drawer
PVC trim
Rear axle ratio options
Rear camera and spot light
Reverse parking sensor integrated into rear step
Full screen satellite navigation
Tachograph - digital
Third stop light
Tow bar with ball
Towing electric socket (13 pin)
Windows electrically operated

For a complete list of Daily options please contact your local Iveco distributor