


# IVECO DAILY

## 35S12 Axess Van

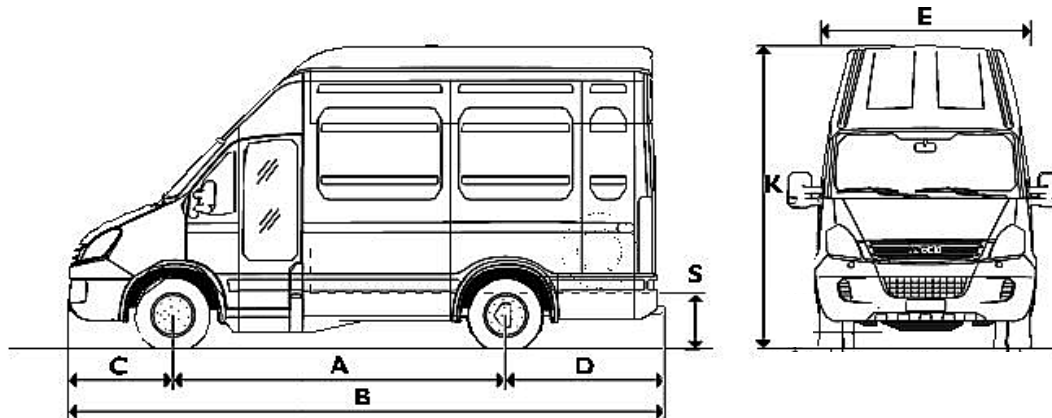

### Model

**35S12                      35S12**

### Dimensions (mm)

	35S12	35S12
<b>A Wheelbase</b>	<b>3300</b>	<b>3950</b>
Roof	HR	HR
<b>B Overall length</b>	<b>5997</b>	<b>7012</b>
<b>C Front overhang</b>	<b>998</b>	<b>998</b>
<b>D Rear overhang</b>	<b>1699</b>	<b>2064</b>
<b>E Overall width</b>	<b>1996</b>	<b>1996</b>
<b>K Overall height (unladen)</b>	<b>2640</b>	<b>2670</b>
<b>S Rear loading height</b>	<b>695</b>	<b>695</b>
Turning circle (k to k) (m)	11.2	13.1
Turning circle (w to w) (m)	12.4	14.3

### Cargo Area

	35S12	35S12
<b>Capacity (m<sup>3</sup>)</b>	<b>12.0</b>	<b>15.6</b>
Internal length	3520	4560
Internal width	1800	1800
Internal height	1900	1900
Width between wheelarches	1320	1320

### Load Access

	35S12	35S12
Rear door opening width	1540	1540
Rear door opening height	1780	1780
Rear door opening angle (deg)	270	270

### Plug Door Access

	35S12	35S12
Plug door opening width	650	650
Plug door opening height	1960	1960
Height of 1st step from ground	300	300
Height of 2nd step from ground	485	485
Height of 3rd step from ground	705	705

### Weights (kg)

*Kerb weights are with full fuel tank, oil, water, spare wheel, tools and include driver @ 75 kg. Kerb weights are subject to a manufacturing tolerance of + or - 5%.*

	35S12	35S12
Wheelbase	3300	3950
GVW	3500	3500
GTW	6300	6300
Kerb weights		
Front axle	1250	1295
Rear axle	910	990
Total	2160	2285
Maximum Payload	1340	1215
Plated weights		
Front axle	1800	1800
Rear axle	2240	2240

# IVECO DAILY 35S12 Axess Van

<b>Engines</b>	<b>S12</b>
Fuel	Diesel
Capacity (litres)	2.3
Cylinders	4 (16 valves)
Emission Compliance	Euro 4
Fuel System	Common rail Generation 2
Power (hp/ kW)	116/ 85
@ rpm	3200-3900
Torque (Nm/ lbft)	270/ 199
@ rpm	1800-2800
Exhaust System	Side emit - RHS

<b>Gearboxes</b>	<b>S12</b>
Type	5S300OD
	5 speed
	synchronmesh
	overdrive
1st gear	4.99 : 1
Top gear	0.78 : 1

<b>Performance</b>		
Gear	1st	Top
Max. geared speed (mph)	16	101
Gradeability @ GVW (%)	40+	6

<b>Rear Axle Ratios</b>	
Std with HR	3.92

<b>Clutch</b>	<b>S12</b>
Type	Hydraulic
Diameter	267

<b>Electrics</b>	
Alternator - std	14v - 110A
Alternator - opt	14v - 140A
Battery	12v - 110Ah

**Lighting & Signalling**  
Halogen headlamps; front fog lamps; twin rear fog lamps; twin reverse lamps

<b>Suspension</b>	
Front	Independent with transverse leaf spring
Rear	Single leaf parabolic
Anti-roll Bar	Standard on rear axle
Shock absorbers	Front and rear

<b>Brakes</b>	
Front / Diameter	Ventilated disc brakes / 300mm
Rear / Diameter	Disc brakes / 296 mm
ABS + EBD	Standard
Parking brake	On rear axle

**Steering** Power assisted - Rack & Pinion

<b>Wheels &amp; Tyres</b>	
Wheels	6JK 16
Tyres	225/ 65R16
Spare	Located behind left wheel arch in rear

**Fuel Tank** 100 litres on RHS with locking fuel cap

## Standard Equipment

### Cab

Fully adjustable driver's seat with headrest	Large dual storage pockets in driver's door
Three point inertia reel belt on driver's seat	Single piece floor mat
Exterior mirrors with integrated wide angle and direction indicators	2 cup holders
A4 storage compartment	Glove compartment with added storage
Cooled compartment (with opt. air conditioning)	Bottle holder
Unimpeded access to cargo area	Additional in-dash storage
Fully glazed electrically operated plug door	Clip holder

### Heating & Ventilation

Four speed fan with 5 different distribution modes and cab recirculation  
Windshield and side window defrost facility  
Fresh air ventilation when heater turned off

### Dashboard incorporates

Dash-mounted gear lever	RDS stereo radio/CD player (with Can security)
Provision for GPS or tachograph	Speedometer
Coolant temperature indicator	Rev.counter
3 DIN drawers, two of which carry CD Player and/or tachograph	
LCD Comfort Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation (dip/main); clock	

### Security

Central locking with remote control and door locking management - anti-theft system	Engine immobiliser
Steering lock	Unglazed rear doors
	Ladder type bulkhead behind driver

### Load Area

Floor - steel ribbed with load lashing rings  
Sides - reinforced with load lashing rings  
Rear access by hinged doors with stops at 90 and 270 degrees and grab handle  
Interior lights at side and rear (door operated with individual isolation)

### Construction & Finish

C-section steel longitudinal side members and tubular cross members with pressed steel unitary construction body mounted on rubber bushes. Anti-corrosion protection includes full catheporetic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

## Options

AGile semi-automated 6-speed gearbox  
Airbag for driver with seat belt pretensioners  
Air conditioning  
Alternator- heavy duty  
Ambient air temperature gauge (option with air conditioning)  
ASR - Traction control  
BlueTooth vivavoce system with steering wheel controls  
Body builder connectors  
Colour keyed bumper and trim  
Comfort seat - driver  
ESP - Electronic Stability Programme (includes ABS - Anti-lock Brakes, EBD - Electronic Brake Force Distribution, ASR - Traction Control, MSR - Motor Torque Reduction, HBA - Hydraulic Brake Assist)  
Exhaust with CRT  
Exterior mirrors - heated and electrically adjustable  
GPS satellite navigation  
Headlamp washers  
Rear axle ratio options  
Rear camera and spot light  
Reverse parking sensor integrated into rear step  
Full screen satellite navigation  
Tachograph - digital  
Third stop light  
Tow bar with ball  
Towing electric socket (13 pin)  
Windows electrically operated on driver's side

For a complete list of Daily options please contact your local Iveco distributor