


IVECO DAILY

40C12 / 40C15 / 40C18 Van

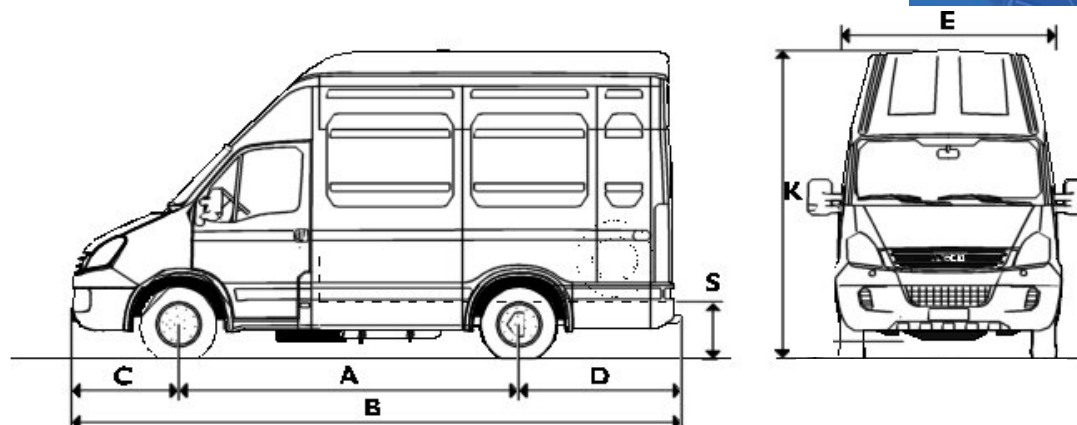

Model

Model	40C12	40C12	40C12	40C12
	40C15	40C15	40C15	40C15
	40C18	40C18	40C18	40C18

Dimensions (mm)

A Wheelbase	3300	3300	3950	3950
Roof	HR	XHR	HR	XHR
B Overall length	5997	5997	7012	7012
C Front overhang	998	998	998	998
D Rear overhang	1699	1699	2064	2064
E Overall width	1996	1996	1996	1996
K Overall height (unladen)	2725	2915	2720	2905
S Rear loading height	750	750	750	750
with opt. rear air suspension- raised	700+70	700+70	700+70	700+70
with opt. rear air suspension- lowered	700-50	700-50	700-50	700-50
Turning circle (k to k) (m)	12.0	12.0	14.0	14.0
Turning circle (w to w) (m)	13.1	13.1	15.1	15.1

Cargo Area

Capacity (m³)	12.0	13.2	15.6	17.2
Internal length	3520	3520	4560	4560
Internal width	1800	1800	1800	1800
Internal height	1900	2100	1900	2100
Width between wheelarches	1030	1030	1030	1030

Load Access

Rear door opening width	1540	1540	1540	1540
Rear door opening height	1780	1990	1780	1990
Rear door opening angle (deg)	270	270	270	270
Side door opening width	1250	1250	1250	1250
Side opening height	1780	1780	1780	1780

Weights (kg)

Kerb weights are with full fuel tank, oil, water, spare wheel, tools and include driver @ 75 kg. Kerb weights are subject to a manufacturing tolerance of + or - 5%.

Model

Model	40C12		40C15		40C18	
Wheelbase	3300	3950	3300	3950	3300	3950
GVW	4350	4350	4350	4350	4350	4350
GTW	7200	7200	7700	7700	7700	7700
Kerb weights - High Roof (HR) models*						
Front axle	1320	1360	1375	1415	1375	1415
Rear axle	1070	1175	1055	1145	1055	1145
Total	2390	2535	2430	2560	2430	2560
Maximum Payload	1960	1815	1920	1790	1920	1790
Plated weights						
Front axle	1900	1900	1900	1900	1900	1900
Rear axle	3100	3100	3100	3100	3100	3100

*Add 30 kg on rear axle for 3300mm XHR models and 35kg on rear axle for 3950mm XHR models

Iveco reserves the right to make such changes to this specification as are appropriate in pursuance of its policy of continuing development. This issue supercedes all previous issues.

IVECO DAILY 40C12 / 40C15 / 40C18 Van

Engines	C12	C15	C18	Electrics	
Fuel	Diesel	Diesel	Diesel	Alternator - std	14v - 110A
Capacity (litres)	2.3	3.0	3.0	Alternator - opt	14v - 140A
Cylinders	4 (16 valves)			Battery	12v - 110Ah
Emission Compliance	Euro 4			Lighting & Signalling	
Fuel System	Common rail Generation 2			Halogen headlamps; front fog lamps; twin rear fog lamps; twin reverse lamps	
Power (hp/ kW)	116/ 85	146/ 107	176/ 130	Suspension	
@ rpm	3200-3900	3000-3500	3200-3500	Front	Independent with torsion bars
Torque (Nm/ lbft)	270/ 199	350/ 258	400/ 295	Rear	Parabolic leaf spring
@ rpm	1800-2800	1400-2600	1250-3000	Anti-roll Bar	Front and rear
Exhaust System	Side emit - RHS			Shock absorbers	Front and rear
Gearboxes	C12	C15	C18	Brakes	
Type	5S300OD	6S400OD	6S400OD	Front / diameter	Ventilated disc brakes / 290 mm
	5 speed	6 speed	6 speed	Rear / diameter	Disc brakes / 289 mm
	synchromesh	synchromesh	synchromesh	ABS + EBD	Standard
	overdrive	overdrive	overdrive	Parking brake	On rear axle
1st gear	4.99 : 1	5.37 : 1	5.37 : 1	Steering	Power assisted - Rack & Pinion
Top gear	0.78 : 1	0.79 : 1	0.79 : 1	Wheels & Tyres	
Performance				Wheels	6JK 16
Gear	1st	Top	1st	Tyres	195/ 75R16
Max. geared speed (mph)	15	94	16	Spare	Located behind left wheel arch in rear
Gradeability @ GVW (%)	39	6	40+	Fuel Tank	70 litres on nearside with locking fuel cap
			6		
			40+		
			7		
Rear Axle Ratios					
Std. with HR	4.18	3.31	3.31		
Clutch	C12	C15	C18		
Type	Hydraulic	Hydraulic	Hydraulic		
Diameter	267	280	280		

Standard Equipment

Cab

Dual passenger seat with headrests
Fully adjustable driver's seat with headrest
Three point inertia reel belt on all seats
Exterior mirrors with integrated wide angle and direction indicators
Underseat storage
A4 storage compartment
Cooled compartment (with opt. air conditioning)

Large dual storage pockets in doors
Single piece floor mat
2 cup holders
Glove compartment with added storage
Bottle holder
Additional in-dash storage
Clip holder

Heating & Ventilation

Four speed fan with 5 different distribution modes and cab recirculation
Windshield and side window defrost facility
Fresh air ventilation when heater turned off

Dashboard incorporates

Dash-mounted gear lever
Provision for GPS or tachograph
Coolant temperature indicator
3 DIN drawers, two of which carry CD Player and/or tachograph
LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation (dip/main); clock

RDS stereo radio/CD player (with Can security)
Tachograph - digital
Rev. counter

Security

Central locking with remote control and door locking management - anti-theft system
Steering lock

Engine immobiliser
Unglazed full bulkhead
Unglazed rear doors

Load Area

Floor - steel ribbed with load lashing rings
Sides - reinforced with load lashing rings
Side access via top hung side sliding door with internal step and grab handle
Rear access by hinged doors with stops at 90 and 270 degrees and grab handle
Interior lights at side and rear (door operated with individual isolation)

Construction & Finish

C-section steel longitudinal side members and tubular cross members with pressed steel unitary construction body mounted on rubber bushes. Anti-corrosion protection includes full cathodic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

Options

AGile semi-automated 6-speed gearbox
Airbag for driver with seat belt pretensioners
Airbags for driver and passengers with seat belt tensioners
Airbags for driver and passengers with seat belt tensioners plus window bags
Air conditioning
Alarm system to cab and load area
Alternator- heavy duty
Ambient air temperature gauge (option with air conditioning)
ASR - Traction control
Blue Tooth vivavoice system with steering wheel controls
Body builder connectors
Colour keyed bumper and trim
Comfort dashboard - LCD panel additions include: External temperature display; servicing indicator; ice warning; automated gearbox
Comfort seats - driver and passenger
ECAS air suspension on rear axle
ESP - Electronic Stability Programme (includes ABS - Anti-lock Brakes, EBD - Electronic Brake Force Distribution, ASR - Traction Control, MSR - Motor Torque Reduction, HBA - Hydraulic Brake Assist)
Exhaust with CRT
Exterior mirrors - heated and electrically adjustable
Fuel tank with locking cap - 100 litres
GPS satellite navigation
Headlamp washers
Overhead windscreen storage rack and DIN drawer
PVC trim
Rear axle ratio options
Rear camera and spot light
Reverse parking sensor integrated into rear step
Full screen satellite navigation
Third stop light
Tow bar with ball
Towing electric socket (13 pin)
Windows electrically operated

For a complete list of Daily options please contact your local Iveco distributor