


IVECO DAILY

45C15 / 45C18 Axess Van

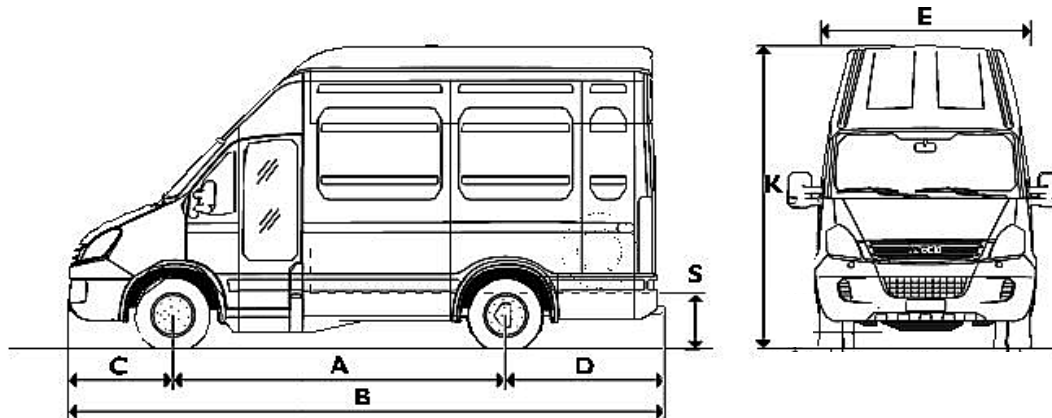

Model

45C15 45C18

Dimensions (mm)

	45C15	45C18
A Wheelbase	3950	3950
Roof	HR	HR
B Overall length	7012	7012
C Front overhang	998	998
D Rear overhang	2064	2064
E Overall width	1996	1996
K Overall height (unladen)	2745	2745
S Rear loading height	775	775
Turning circle (k to k) (m)	14.0	14.0
Turning circle (w to w) (m)	15.1	15.1

Cargo Area

	45C15	45C18
Capacity (m³)	15.6	15.6
Internal length	4560	4560
Internal width	1800	1800
Internal height	1900	1900
Width between wheelarches	1030	1030

Load Access

	45C15	45C18
Rear door opening width	1540	1540
Rear door opening height	1780	1780
Rear door opening angle (deg)	270	270

Plug Door Access

	45C15	45C18
Plug door opening width	650	650
Plug door opening height	1960	1960
Height of 1st step from ground	380	380
Height of 2nd step from ground	565	565
Height of 3rd step from ground	785	785

Weights (kg)

Kerb weights are with full fuel tank, oil, water, spare wheel, tools and include driver @ 75 kg. Kerb weights are subject to a manufacturing tolerance of + or - 5%.

	45C15	45C18
Wheelbase	3950	3950
GVW	4600	4600
GTW	8100	8100
Kerb weights		
Front axle	1445	1445
Rear axle	1135	1135
Total	2580	2580
Maximum Payload	2020	2020
Plated weights		
Front axle	1900	1900
Rear axle	3400	3400

IVECO DAILY 45C15 / 45C18 Axess Van

Engines	C15	C18		
Fuel	Diesel	Diesel		
Capacity (litres)	3.0	3.0		
Cylinders	4 (16 valves)			
Emission Compliance	Common rail Generation 2			
Power (hp/ kW)	146/ 107	176/ 130		
@ rpm	3000-3500	3200-3500		
Torque (Nm/ lbft)	350/ 258	400/ 295		
@ rpm	1400-2600	1250-3000		
Exhaust System	Side emit - RHS			
Gearboxes	C15	C18		
Type	6S400OD	6S400OD		
	6 speed	6 speed		
	synchromesh	synchromesh		
	overdrive	overdrive		
1st gear	5.37 : 1	5.37 : 1		
Top gear	0.79 : 1	0.79 : 1		
Performance*				
Gear	1st	Top	1st	Top
Max. geared speed (mph)	14	97	14	97
Gradeability @ GVW (%)	40+	6	40+	7
Rear Axle Ratios				
Std. with HR	3.62	3.62		
Clutch	C15	C18		
Type	Hydraulic	Hydraulic		
Diameter	280	280		

Electrics	
Alternator - std	14v - 110A
Alternator - opt	14v - 140A
Battery	12v - 110Ah

Lighting & Signalling

Halogen headlamps; front fog lamps; twin rear fog lamps; twin reverse lamps

Suspension

Front	Independent with transverse leaf spring
Rear	Parabolic leaf spring
Anti-roll Bar	Front and rear
Shock absorbers	Front and rear

Brakes

Front / Diameter	Ventilated disc brakes / 290mm
Rear / Diameter	Disc brakes / 289 mm
ABS + EBD	Standard
Parking brake	On rear axle

Steering

Power assisted - Rack & Pinion

Wheels & Tyres

Wheels	6JK 16
Tyres	195/75R16
Spare	Located behind left wheel arch in rear

Fuel Tank

100 litres on RHS with locking fuel cap

Standard Equipment

Cab

Fully adjustable driver's seat with headrest	Large dual storage pockets in driver's door
Three point inertia reel belt on driver's seat	Single piece floor mat
Exterior mirrors with integrated wide angle and direction indicators	2 cup holders
A4 storage compartment	Glove compartment with added storage
Cooled compartment (with opt. air conditioning)	Bottle holder
Unimpeded access to cargo area	Additional in-dash storage
Fully glazed electrically operated plug door	Clip holder

Heating & Ventilation

Four speed fan with 5 different distribution modes and cab recirculation
Windshield and side window defrost facility
Fresh air ventilation when heater turned off

Dashboard incorporates

Dash-mounted gear lever	RDS stereo radio/CD player (with Can security)
Provision for GPS or tachograph	Speedometer
Coolant temperature indicator	Rev.counter
3 DIN drawers, two of which carry CD Player and/or tachograph	
LCD Comfort Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation (dip/main); clock	

Security

Central locking with remote control and door locking management - anti-theft system	Engine immobiliser
Steering lock	Unglazed rear doors
	Ladder type bulkhead behind driver

Load Area

Floor - steel ribbed with load lashing rings
Sides - reinforced with load lashing rings
Rear access by hinged doors with stops at 90 and 270 degrees and grab handle
Interior lights at side and rear (door operated with individual isolation)

Construction & Finish

C-section steel longitudinal side members and tubular cross members with pressed steel unitary construction body mounted on rubber bushes. Anti-corrosion protection includes full catheporetic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

Options

AGile semi-automated 6-speed gearbox
Airbag for driver with seat belt pretensioners
Air conditioning
Alternator- heavy duty
Ambient air temperature gauge (option with air conditioning)
ASR - Traction control
Blue Tooth vivavoce system with steering wheel controls
Body builder connectors
Colour keyed bumper and trim
Comfort seat - driver
ESP - Electronic Stability Programme (includes ABS - Anti-lock Brakes, EBD - Electronic Brake Force Distribution, ASR - Traction Control, MSR - Motor Torque Reduction, HBA - Hydraulic Brake Assist)
Exhaust with CRT
Exterior mirrors - heated and electrically adjustable
GPS satellite navigation
Headlamp washers
Rear axle ratio options
Rear camera and spot light
Reverse parking sensor integrated into rear step
Full screen satellite navigation
Tachograph - digital
Third stop light
Tow bar with ball
Towing electric socket (13 pin)
Windows electrically operated on driver's side

For a complete list of Daily options please contact your local Iveco distributor