


IVECO DAILY

60C18 Van

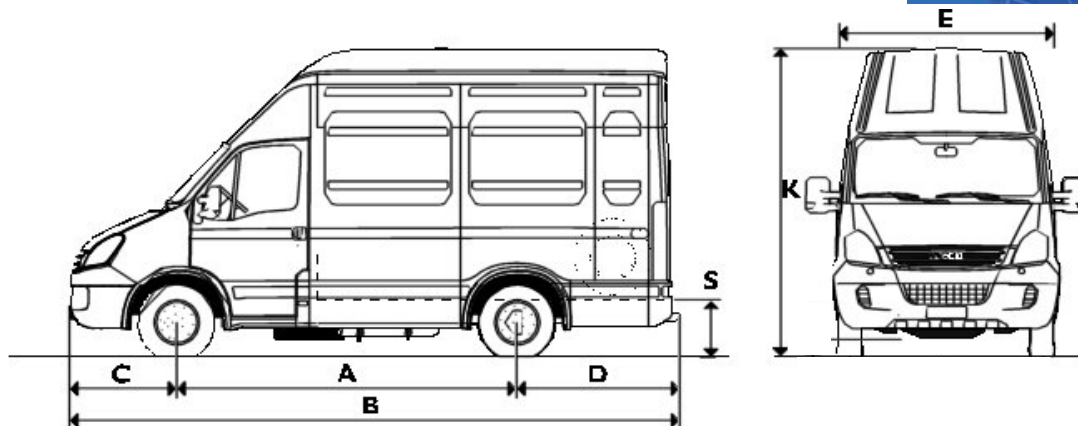

Model

60C18

Dimensions (mm)

A Wheelbase	3950
Roof	XHR
B Overall length	7012
C Front overhang	998
D Rear overhang	2064
E Overall width	2174
K Overall height (unladen)	3025
S Rear loading height	870
with opt. rear air suspension- raised	800+85
with opt. rear air suspension- lowered	800-65
Turning circle (k to k) (m)	13.8
Turning circle (w to w) (m)	14.9

Cargo Area

Capacity (m³)	17.2
Internal length	4560
Internal width	1800
Internal height	2100
Width between wheelarches	1030

Load Access

Rear door opening width	1540
Rear door opening height	1990
Rear door opening angle (deg)	270
Side door opening width	1250
Side opening height	1780

Weights (kg)

Kerb weights are with full fuel tank, oil, water, spare wheel, tools and include driver @ 75 kg. Kerb weights are subject to a manufacturing tolerance of + or - 5%.

Wheelbase	3950
Roof	XHR
GVW	6000
GTW	9500
Kerb weights	
Front axle	1475
Rear axle	1360
Total	2835
Maximum Payload	3165
Plated weights	
Front axle	2300
Rear axle	4650

IVECO DAILY 60C18 Van

Engines

Fuel	Diesel
Capacity (litres)	3.0
Cylinders	4 (16 valves)
Emission Compliance	Common rail Generation 2
Power (hp/ kW)	176/ 130
@ rpm	3200-3500
Torque (Nm/ lbft)	400/ 295
@ rpm	1250-3000
Exhaust System	Side emit - RHS
Exhaust with CRT	Standard

Gearboxes

Type	6S400OD
	6 speed
	synchromesh
	overdrive
1st gear	5.37 : 1
Top gear	0.79 : 1

Performance

Gear	1st	Top
Max. geared speed (mph)	13	87
Gradeability @ GVW (%)	40+	6

Rear Axle Ratios

Std. with HR	4.3
--------------	-----

Clutch

Type	Hydraulic
Diameter	280

Electrics

Alternator - std	14v - 110A
Alternator - opt	14v - 140A
Battery	12v - 110Ah

Lighting & Signalling

Halogen headlamps; front fog lamps; twin rear fog lamps; twin reverse lamps

Suspension

Front	Independent with torsion bars
Rear	Parabolic leaf spring
Anti-roll Bar	Front and rear
Shock absorbers	Front and rear

Brakes

Front / Diameter	Ventilated disc brakes / 301 mm
Rear / Diameter	Ventilated disc brakes / 306 mm
ABS + EBD	Standard
Parking brake	On rear axle

Steering

Power assisted - Rack & Pinion

Wheels & Tyres

Wheels	6JK 16
Tyres	225/ 75R 16
Spare	Located behind left wheel arch in rear

Fuel Tank

100 litres on nearside with locking fuel cap

Standard Equipment

Cab

Dual passenger seat with headrests	Large dual storage pockets in doors
Fully adjustable driver's seat with headrest	Single piece floor mat
Three point inertia reel belt on all seats	2 cup holders
Exterior mirrors with integrated wide angle and direction indicators	2 spare DIN drawers in dash
Underseat storage	1 DIN drawer for CD player in dash
A4 storage compartment	Glove compartment with added storage
Clip holder	Bottle holder
Cooled compartment (with opt. air conditioning)	Additional in-dash storage

Heating & Ventilation

Four speed fan with 5 different distribution modes and cab recirculation
Windshield and side window defrost facility
Fresh air ventilation when heater turned off

Dashboard incorporates

Dash-mounted gear lever	RDS stereo radio/CD player (with Can security)
Provision for GPS or tachograph	Tachograph - digital
Coolant temperature indicator	Rev. counter
3 DIN drawers, two of which carry CD Player and/or tachograph	
LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption etc; headlamp orientation (dip/main); clock	

Security

Central locking with remote control and door locking management - anti-theft system	Engine immobiliser
Steering lock	Unglazed full bulkhead
	Unglazed rear doors

Load Area

Floor - steel ribbed with load lashing rings
Sides - reinforced with load lashing rings
Side access via top hung side sliding door with internal step and grab handle
Rear access by hinged doors with stops at 90 and 270 degrees and grab handle
Interior lights at side and rear (door operated with individual isolation)

Construction & Finish

C-section steel longitudinal side members and tubular cross members with pressed steel unitary construction body mounted on rubber bushes. Anti-corrosion protection includes full cathophoretic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

Options

AGile semi-automated 6-speed gearbox
Airbag for driver with seat belt pretensioners
Airbags for driver and passengers with seat belt tensioners
Airbags for driver and passengers with seat belt tensioners plus window bags
Air conditioning
Alarm system to cab and load area
Alternator- heavy duty
Ambient air temperature gauge (option with air conditioning)
ASR - Traction control
Blue Tooth vivavoice system with steering wheel controls
Body builder connectors
Colour keyed bumper and trim
Comfort dashboard - LCD panel additions include: External temperature display; servicing indicator; ice warning; automated gearbox
Comfort seats - driver and passenger
ECAS air suspension on rear axle
ESP - Electronic Stability Programme (includes ABS - Anti-lock Brakes, EBD - Electronic Brake Force Distribution, ASR - Traction Control, MSR - Motor Torque Reduction, HBA - Hydraulic Brake Assist)
Exterior mirrors - heated and electrically adjustable
GPS satellite navigation
Headlamp washers
Overhead windscreen storage rack and DIN drawer
PVC trim
Rear axle ratio options
Rear camera and spot light
Reverse parking sensor integrated into rear step
Full screen satellite navigation
Third stop light
Tow bar with ball
Towing electric socket (13 pin)
Windows electrically operated

For a complete list of Daily options please contact your local Iveco distributor